


Rev.	Description	Date
01	Release for Production	07/18/2012

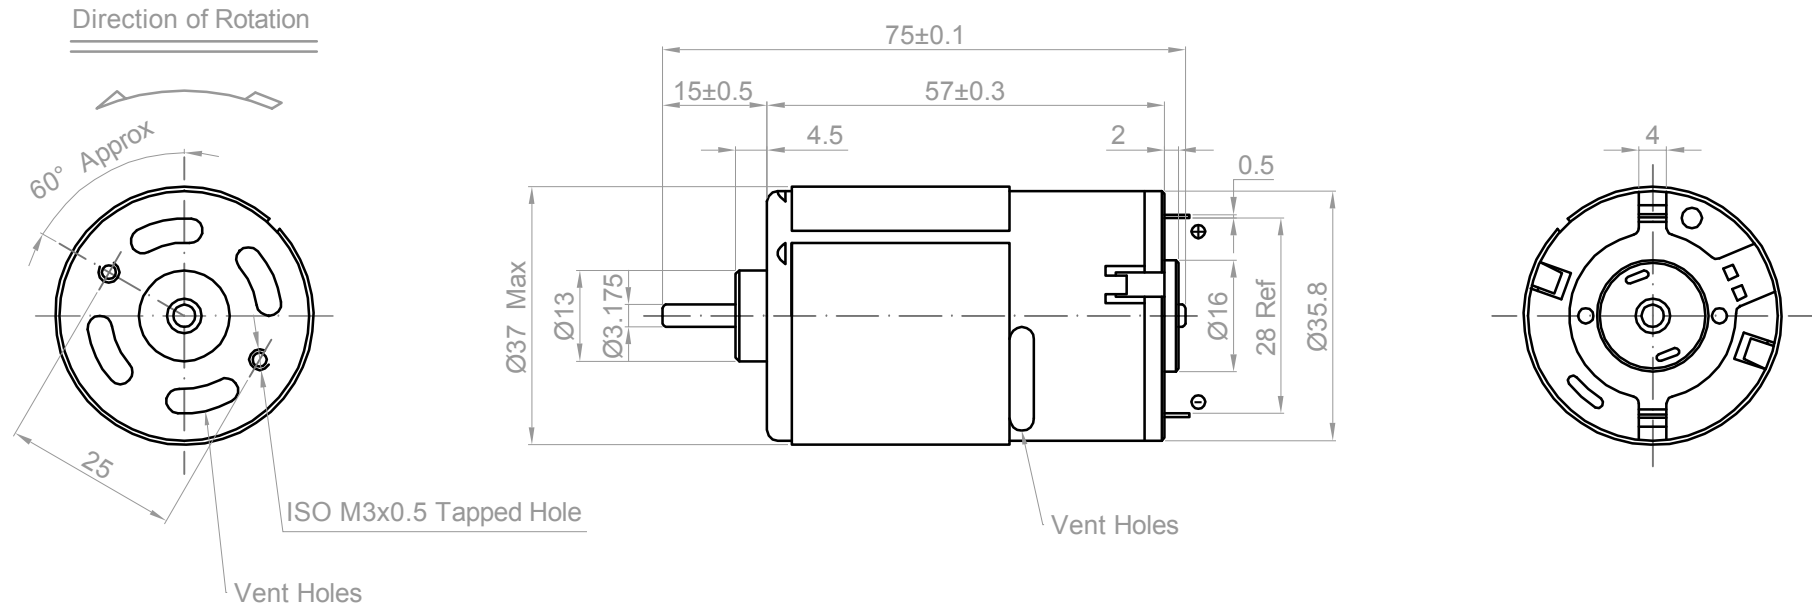

- 1.Rated Voltage:110 V
- 2.Direction of Rotation:CCW
- 3.No-Load Current:0.063 A Max
- 4.No-Load Speed:11000±10% RPM
- 5.Rated Current:0.32 A Max
- 6.Rated Speed:9900 RPM
- 7.Rated Torque:257 g.cm
- 8.Stall Torque:2100 g.cm

Test Condition:
 1.Voltage:110V AC Full Wave Rectification with 4PCS Diodes
 2.Operating Temperature Range:-10°C~60°C

Notes:
 1.End Play 0.5mm Max
 2.Direction of Rotation:Anti-clockwise When Viewing Motor Output End With Positive Voltage Applied to Positive Terminal.

Drawn	Feny	07/18/2012	Kysan Electronics www.kysanelectronics.com info@kysanelectronics.com		
Checked	Sara	07/18/2012			
Eng Appr.					
Mfg Appr.					
Q.A.					
SKU	1111070		Size : A4	Weight(Kg):	Unit: mm
			Scale: 2:1		Sheet 1 of 1