


RS-365

DIRECTION OF ROTATION

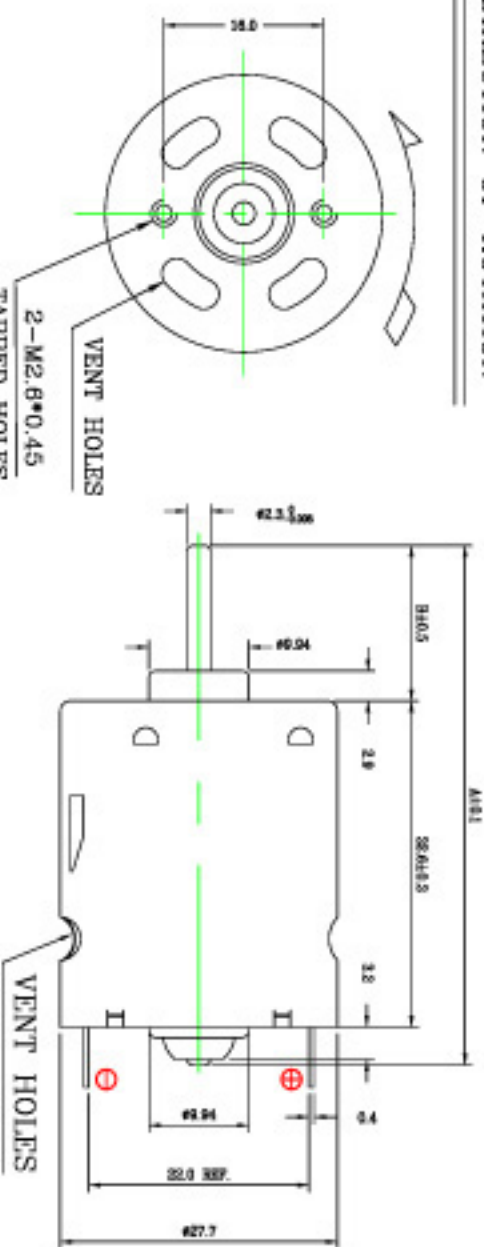

TEST CONDITION : TAPPED HOLES

1. RATED VOLTAGE : 24.0 VDC
 2. OPERATING TEMPERATURE RANGE : -10 °C----- 60 °C

AT NO LOAD :

1. CURRENT : 0.07 A
 2. SPEED : 10800 rpm

AT MAXIMUM EFFICIENCY :


1. CURRENT : 0.32 A
 2. OUTPUT : 4.5 W
 3. SPEED : 8500 rpm
 4. TORQUE : 52.0 g . cm

AT STALL :

1. CURRENT : 1.3 A
 2. TORQUE : 260 g . cm

NOTES:

1. LENGTH OF SHAFT DIM"A" IS: 52.0 mm
2. FRONT EXTENSION DIM"B" IS: 15.2 mm MEASURED WITH SHAFT PUSHED TO PLASTIC END CAP
3. END PLAY 0.50 mm Max.
4. DIRECTION OF ROTATION: ANTI-CLOCKWISE WHEN VIEWING MOTOR OUTPUT END WITH POSITIVE VOLTAGE APPLIED TO POSITIVE TERMINAL

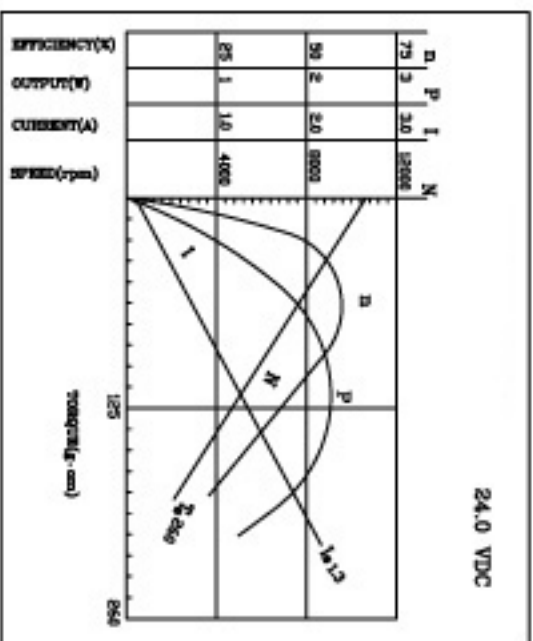

CUSTOMER NO.

S0287-KS-021