


NO.	ITEM	SPCIFICATION	CONDITION
1	Rated Voltage	12V	
2	NO. of Phase	2	
3	Step Angle	1.8° ± 5%	
4	No.of Step per Revolution		
5	Resistance Per Phase	20 ± 10%	
6	Inductance Per Phase	20mH± 20%	
7	Current Per Phase	0.5A	
8	Holding Torque	1Kg.cm	
9	Pull-in Rate		
10	Insulation Class	Class B	
11	Dielectric Strength	100Mohm	500VDC
12	Insulation Resistance		
13	Operation Temp Range	-20 ~ +50° C	
14	Storage Temp Range		
15	Detent Torque	150g.cm	
16	Rotor Inertia		
17	Stepping Accuracy		
18	Life		
19	Lead Wire	AWG26# 1061	
20	MFG of Terminal	2510	
21	Weight	0.13Kg(Max)	

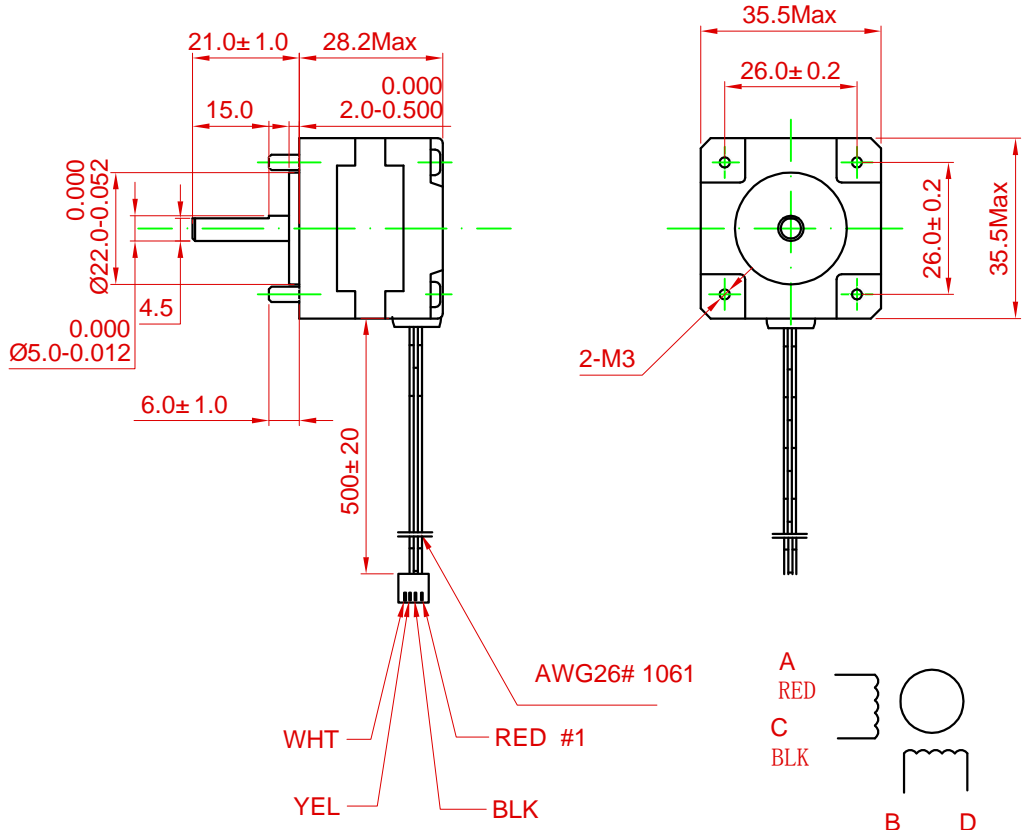

Rev.	Revision	Date
01	Update	2010/08/20

DRAWN	Ma Yunlei	2010/08/20	UNIT:mm		
CHECKED	Sara	2010/08/20	Kysan Electronics		
ENG APPR.			SIZE	DWG.NO.	REV
MFG APPR.			A4	1124020	01
Q.A.			SCALE:1:1	Weight(kg):0.13	SHEET 1 OF 1
35BYG005-F					