



NO.	ITEM	SPECIFICATION	CONDITION
1	Rated Voltage	4.55V	
2	NO. of Phase	2	
3	Step Angle	1.8° ± 5%	
4	No. of Step per Revolution		
5	Resistance Per Phase	7Ω ± 10%	
6	Inductance Per Phase	9.3mH ± 20%	
7	Current Per Phase	0.65A	
8	Holding Torque	1.8Kg.cm	
9	Pull-in Rate		
10	Insulation Class	Class B	
11	Dielectric Strength	100Mohm	500VDC
12	Insulation Resistance		
13	Operation Temp Range	-20 ~ +50° C	
14	Storage Temp Range		
15	Detent Torque		
16	Rotor Inertia		
17	Stepping Accuracy		
18	Life		
19	Lead Wire	UL1007 AWG26	
20	MFG of Terminal	N/A	
21	Weight	0.14Kg(Max)	

Rev.	Revision	Date
01	Update	9/15/2010

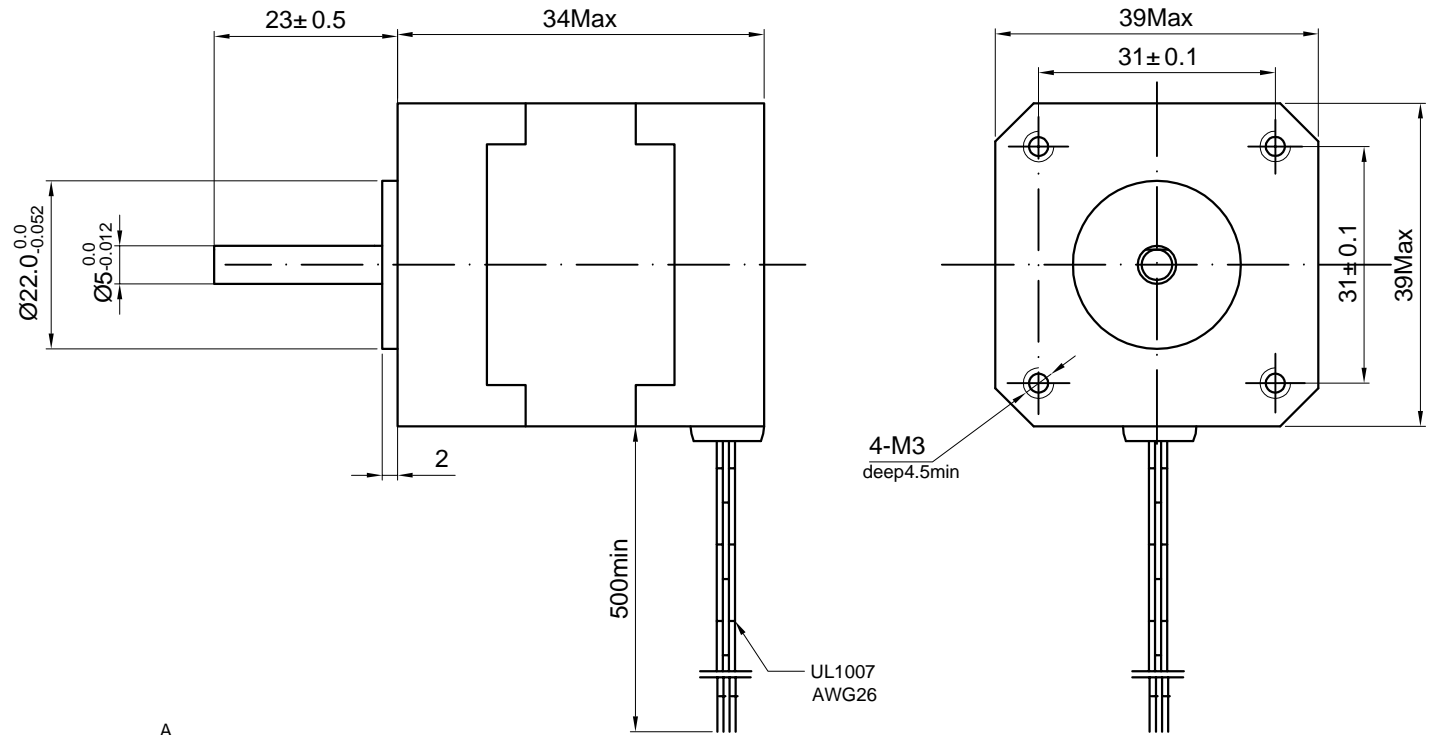

DRAWN	Michael	9/15/2010	UNIT: mm	
CHECKED	Sara	9/15/2010		
ENG APPR.			Sinotech	
MFG APPR.				
Q.A.				
39BYG101-01			SIZE A4	DWG.NO. 237497
			SCALE: 1.5 : 1	REV 01
			Weight(kg): 0.14	SHEET 1 OF 1