



| Rev. | Description | Date |
|------|------------------------|------------|
| 01 | Release for Production | 05/02/2013 |

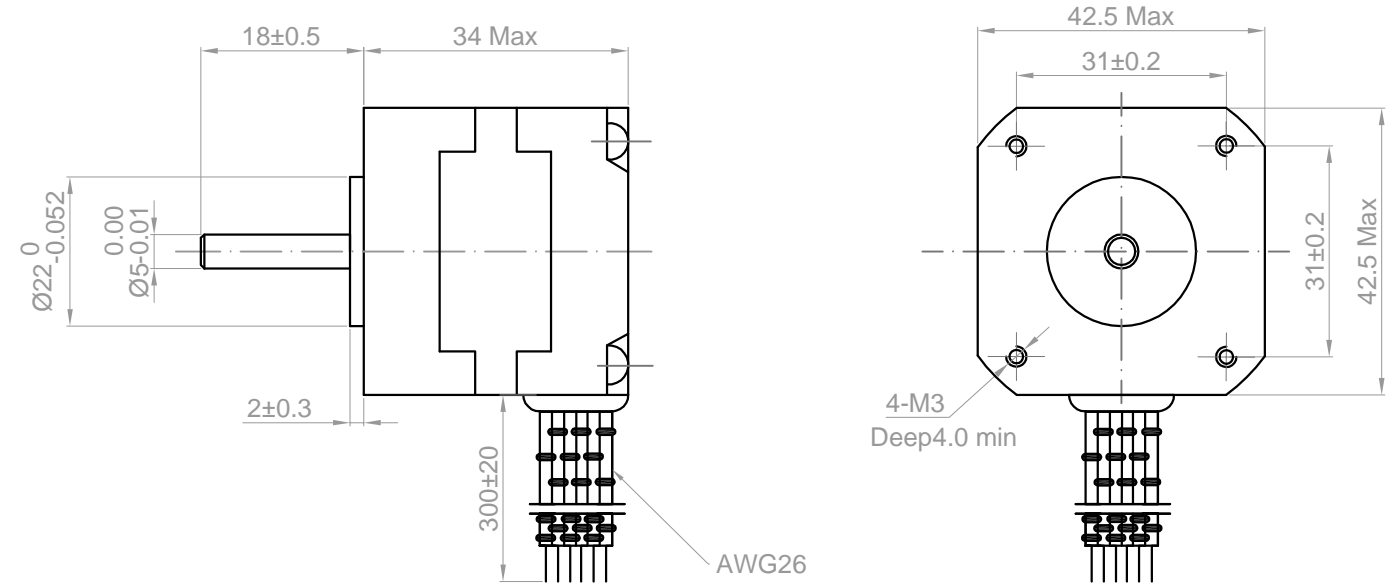

| NO. | Item | Specification | NO. | Item | Specification |
|-----|----------------------|---------------|-----|-----------------------|------------------|
| 1 | Step Angle | 1.8°±5% | 7 | Holding Torque | 0.95 Kg.cm (Min) |
| 2 | Rated Voltage | 12 V | 8 | Insulation Class | Class B |
| 3 | Current Per Phase | 0.16 A | 9 | Insulation Resistance | 100MΩ <500V DC> |
| 4 | Resistance Per Phase | 70 Ω ±10% | | | |
| 5 | Inductance Per Phase | 44 mH ±20% | | | |
| 6 | Number of Phase | 4 | | | |

| | | |
|-----------|---------|------------|
| Drawn | Gimy | 05/02/2013 |
| Checked | Sara | 05/02/2013 |
| Eng Appr. | | |
| Mfg Appr. | | |
| Q.A. | | |
| SKU | 1123002 | |

Kysan Electronics

www.kysanelectronics.com

info@kysanelectronics.com

| | | |
|------------|------------------|-------------|
| Size : A4 | Weight(Kg): 0.22 | Unit: mm |
| Scale: 2:1 | | Sheet 1of 1 |