



接线图
Wiring Diagram



规格 SPECIFICATIONS

1	相数 Number of Phase	4
2	步距角 Step Angle	1.8° ±5%
3	保持力矩 Holding Torque	5.4 kg·cm
4	电压 Voltage	24 VDC
5	电流 Current	0.34 A
6	相电阻 Phase Resistance (20°C)	70 ±10% Ω
7	相电感 Phase Inductance (1KHz)	80 ±20% mH
8	转子惯量 Rotor Inertia	134g·cm ²
9	绝缘电阻 Insulation Resistance	100M Ω 500VDC
10	绝缘等级 Insulation Class	B (130°C)
11	环境温度 Ambient Temperature	-20°C to 50°C
12	环境湿度 Ambient Humidity	15% to 95%
13	电机重量 Motor Weight	Approx 0.42 kg
14		

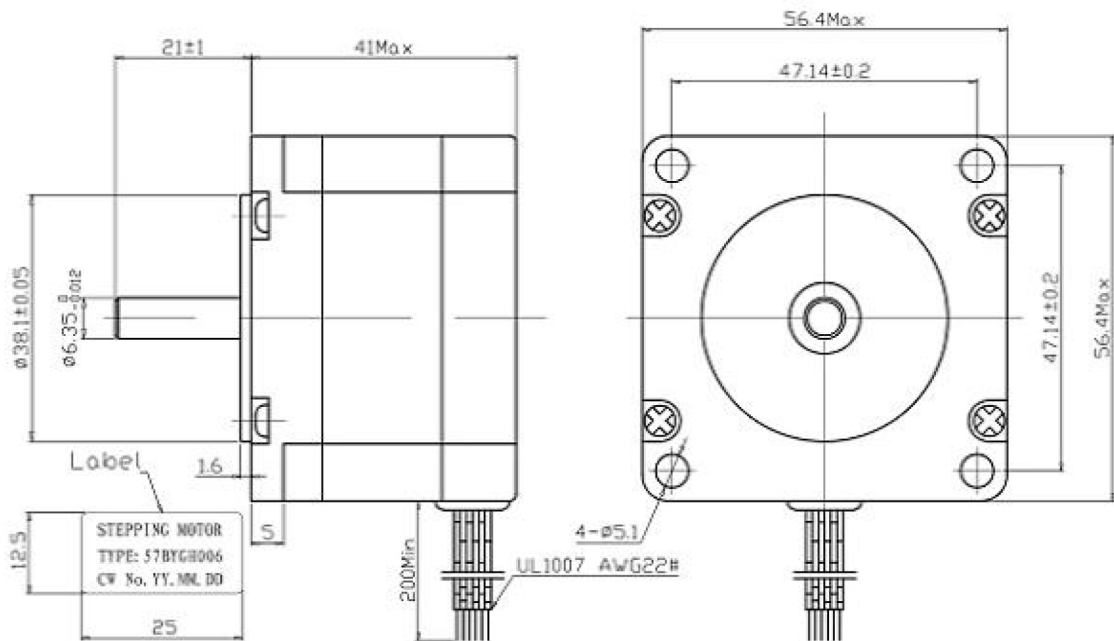

励磁顺序 (2相励磁)

EXITING SEQUENCE (2 PHASE)

STEP	A	B	\bar{A}	\bar{B}	CCW
1	+	-	-	-	↑
2	-	+	+	-	
3	-	-	+	+	
4	+	-	-	+	

↓ CW

NOTE: This document is released for information only. Its reproduction in whole or in part or its dissemination to third parties is prohibited. Unless otherwise specified all trademarks and registered trademarks appearing on this document are the property of Changzhou Chuangwei Motor & Electric Apparatus Co., Ltd.

Unit:mm
第一角画法
First angle method
未注线性与角度尺寸公差
Tolerances for linear and angular dimensions
without individual tolerance indications
GB/T 1804-2000 eqv ISO 2768-1:2000
未注形状与位置尺寸公差
Geometrical tolerances for features without
individual tolerance indications
GB/T 1184-2008 eqv ISO 1101:2004



设计 DESIGN	XH
校核 CHECK	
工艺 TECHNOLOGY	
标准化 STANDARD	
批准 APPROVE	
NAMES	SIGNATURE
	DATE

Kysan Electronics
1126008

TYPE: HYBRID STEPPING MOTOR SCALE: XX Rev. 2.0 SHEET 1 OF 6

Model: **57BYGH006**

V2.0	HPS1708283	20170831
REV.	版本记录 REVISION RECORD	DATE

UNLESS OTHERWISE SPECIFIED