



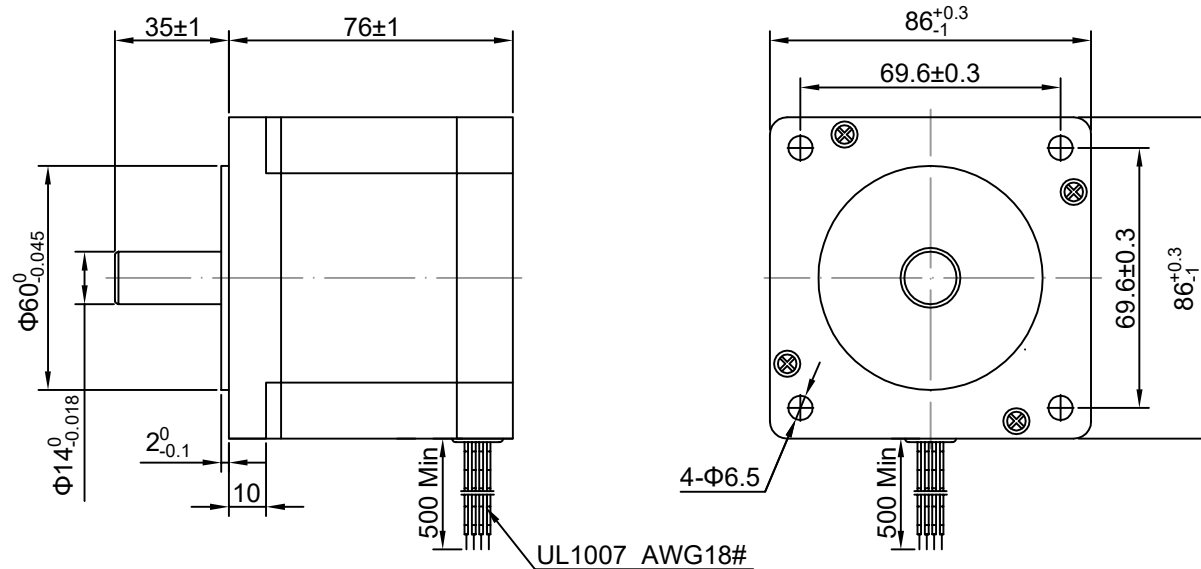

Wiring Diagram



Exiting Sequence (2 Phase)

Step	A	B	$\bar{A}$	$\bar{B}$	CW
1	+	+	-	-	
2	-	+	+	-	
3	-	-	+	+	
4	+	-	-	+	

No.	Item	Specification	No.	Item	Specification
1	Rated Voltage	1.68V DC	7	Holding Torque	30Kg.cm
2	Step Angle	$1.8^\circ \pm 5\%$	8	Insulation Resistance	100M Ω 500VDC
3	Number of Phase	2	9	Ambient Temperature	-20°C to 50°C
4	Current	4.0A	10	Insulation Class	B
5	Phase Resistance	$0.42\Omega \pm 10\%$			
6	Phase Inductance	$2.2\text{mH} \pm 20\%$			

Drawn	Tony	12/05/2025	Unit: mm		
Checked	Eva	12/05/2025	Kysan Electronics www.kysanelectronics.com		
Eng Appr.					
Mfg Appr.					
Q.A.					
SKU:			Siae: A4	Weight:	2.3Kg (approx)
1127009			Scale		