
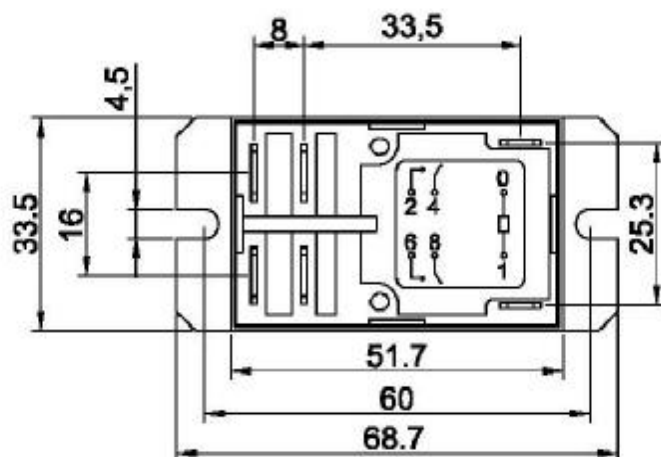


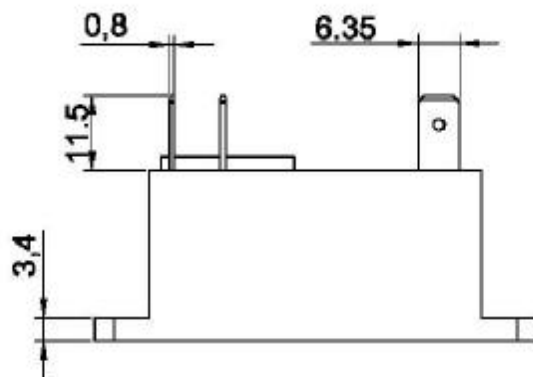

1).Contact Rating:
 NO: 30 A, 277 V AC, Resistive
 16 FLA, 277 V AC
 1 HP, 120 VAC
 2 HP, 277 VAC

2).Coil Rated Voltage:
 24VDC
 Pick-Up: During 75%~110% coil rated voltage should pick up reliably
 Drop-Out: During 10%~70% coil rated voltage should drop out reliably


3).Coil Resistance:
 $310 \Omega \pm 10\%$

4).Insulation class:
 Class F Insulation

5).Service Life:
 Mechanical Life 1,000,000 Operations
 Electrical Life 100,000 Operations

6).Mark Approved :
 UL : E251539

Contact Configuration



SCALE: 1" = 1.5"

UNLESS OTHERWISE
 SPECIFIED
 DIMENSIONS ARE IN MM
 TOLERANCES:
 .XX- ± 1
 .XXX- $\pm .5$
 ANGLE- $\pm 3^\circ$

Kysan Electronics
www.kysanelectronics.com

DRAWN BY: Zhao Ping	DATE: 04/20/2008	MFG: HLR-72ACTAA	
CHECKED BY: Wang qiang	DATE: 11/21/2014		
APPROVED BY: Xinhua Zhou	DATE: 11/21/2014	SKU: 1411204	SHEET REV.
APPROVED BY:	DATE:		