



TFB(S)12038H(M/L)24

Features

Size: 120 x 120 x 38mm (4.72 x 4.72 x 1.50in)

Frame/Impeller: Reinforced Plastic UL94V-0

Bearings: Ball Bearing & Sleeve Bearing



Life Expectancy: 50,000 Hours at 20°C - Ball

30,000 Hours at 20°C - Sleeve

Approvals: CE RoHS

Weight: 265g

Air Flow vs Air Pressure

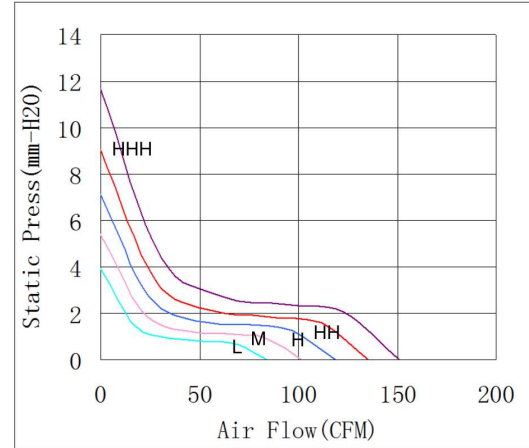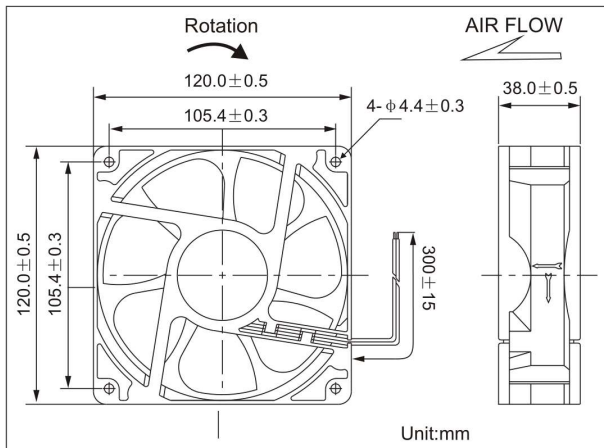

Performance

Model	Bearing System		Rated Voltage (VDC)	Current (A)	Input Power (W)	Nominal Speed (R.P.M)	Air Flow (CFM)	Air Pressure (mm-H ₂ O)	Noise (dBA)
	S	B							
TFB(S)12038L12	✓	✓	12	0.32	3.96	2000	84.50	3.94	33.80
TFB(S)12038M12	✓	✓	12	0.48	5.76	2500	101.30	5.41	39.10
TFB(S)12038H12	✓	✓	12	0.80	9.60	3000	118.70	7.14	43.80
TFB(S)12038HH12	✓	✓	12	0.93	11.16	3500	135.80	9.04	47.90
TFB(S)12038L24	✓	✓	24	0.22	5.28	2000	84.50	3.94	33.80
TFB(S)12038M24	✓	✓	24	0.31	7.44	2500	101.30	5.41	39.10
TFB(S)12038H24	✓	✓	24	0.40	9.60	3000	118.70	7.14	43.80
TFB(S)12038HH24	✓	✓	24	0.42	10.08	3500	135.80	9.04	47.90
TFB(S)12038M48	✓	✓	48	0.13	6.24	2500	101.30	5.41	39.10
TFB(S)12038H48	✓	✓	48	0.20	9.60	3000	118.70	7.14	43.80
TFB(S)12038HH48	✓	✓	48	0.25	12.00	3500	135.80	9.04	47.90
TFB(S)12038HHH48	✓	✓	48	0.32	15.36	4000	151.17	11.66	50.60

Product specification contained herein maybe changed without prior notice

It is there fore advisable to contact Kysan before proceeding with the design of equipment incorporating this product

Kysan Electronics Inc.

2570 North First Street Suite 220, San Jose California 95131, United States

Phone: 408-324-1638 Fax: 408-324-1665