
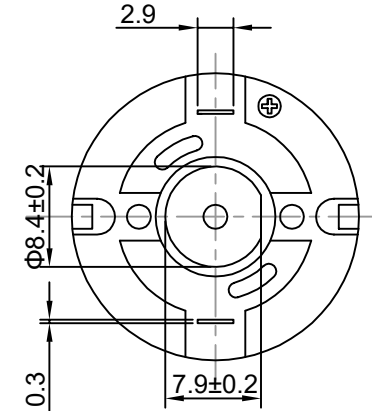
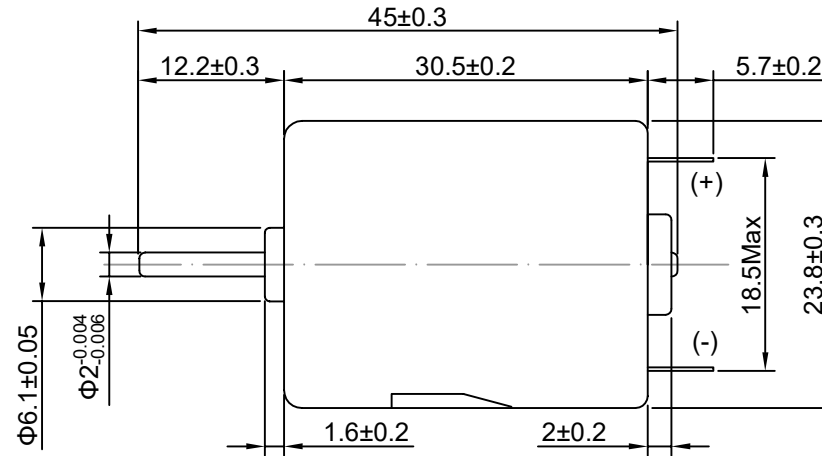



Direction Of Rotation

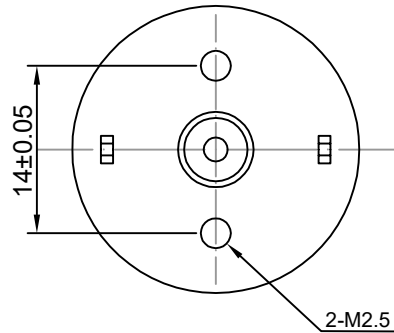

No.	Item	Specification	No.	Item	Specification
1	Rated Voltage	7.2V DC	7	Rated Load	33.3g.cm
2	Voltage Range	6.0-9.0V DC	8	Start Voltage	1.2V Max
3	No Load Current	300mA Max	9	Stall Current	10.5A Max
4	No Load Speed	16800±10%RPM	10		
5	Rated Load Current	1180mA Max			
6	Rated Load Speed	14260±10%RPM			

Drawn	Tony	08/26/2026	Unit: mm		
Checked	Eva	08/26/2026	Kysan Electronics www.kysanelectronics.com		
Eng Appr.					
Mfg Appr.					
Q.A.					
SKU:			Siae: A4	Weight(Kg):	
1112103			Scale		

马达全功能测试曲线图

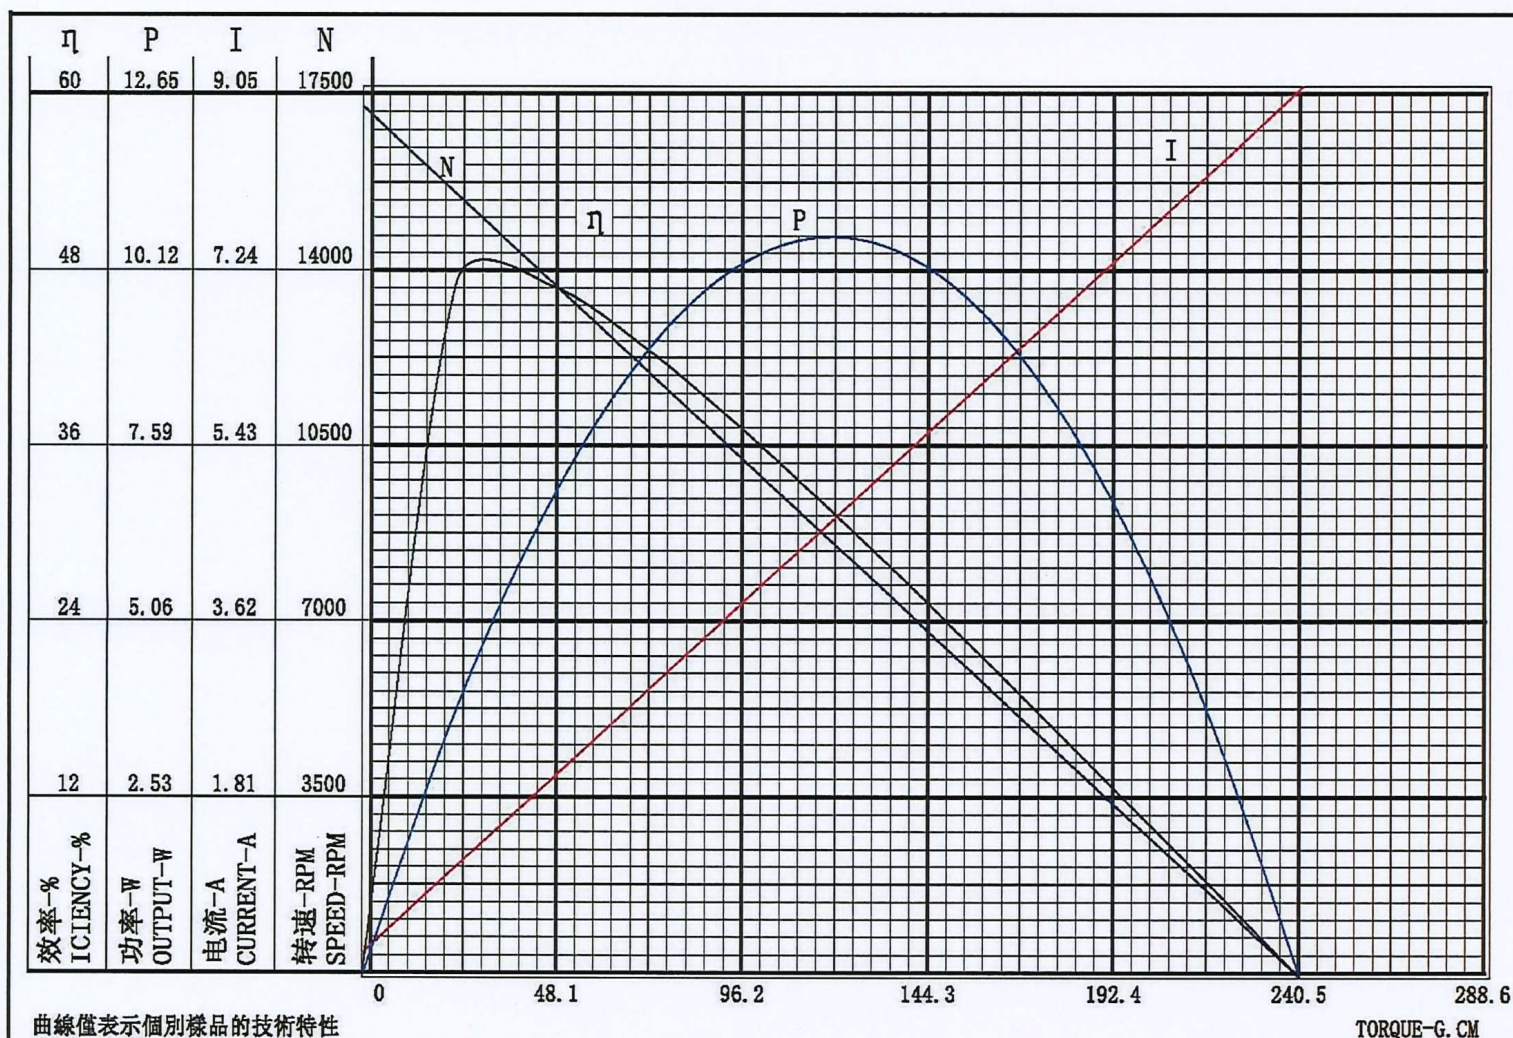

曲線僅表示個別樣品的技術特性

THE CURVES REPRESENT THE THEORETICAL PERFORMANCE OF THE SAMPLE SAMPLE ONLY.

性能PERFORMANECE

無負荷點AT NO LOAD

轉速SPEED = 17120 RPM

電流CURRENT = 0.240 AMP

堵轉點AT STALL EXTRAPOLATION

力矩TORQUE = 240.000 G. CM

電流CURRENT = 9.040 AMP

最大效率點AT MAXIMUM EFFICIENCY

效率EFFICIENCY = 47.867 %

轉速SPEED = 14723 RPM

力矩TORQUE = 33.600 G. CM

電流CURRENT = 1.472 AMP

功率OUTPUT = 5.074 WATTS

最大輸出功率點AT MAXIMUM OUTPUT

效率EFFICIENCY = 31.534 %

轉速SPEED = 8560 RPM

力矩TORQUE = 120.000 G. CM

電流CURRENT = 4.640 AMP

功率OUTPUT = 10.535 WATTS

出件人Prepared by: _____

审核人Checked by: _____