
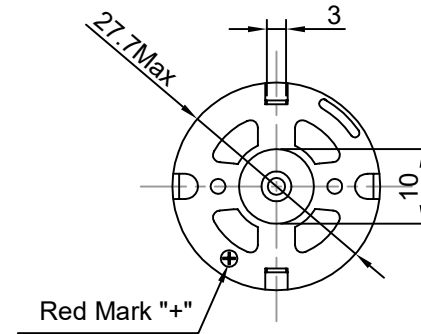
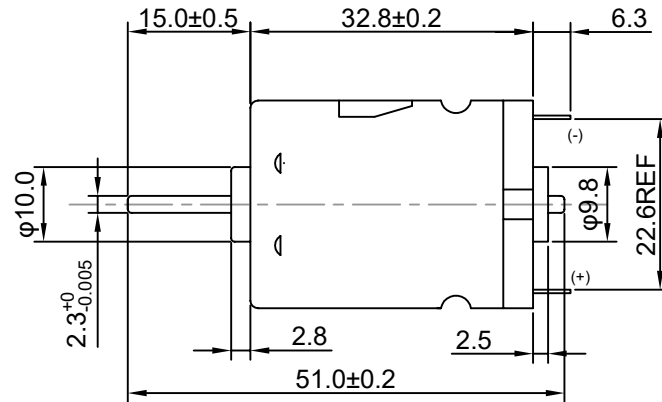


Direction Of Rotation

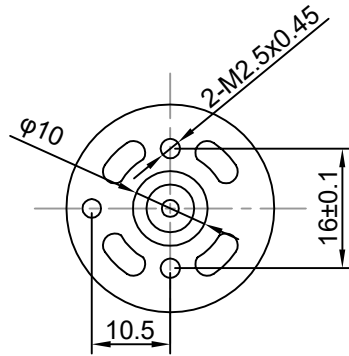


No.	Item	Specification	No.	Item	Specification
1	Rated Voltage	12V DC	7	Rated Load	28.62g.cm
2	Voltage Range	11.0-13.0V DC	8	Shaft End Play	0.02-0.5mm
3	No Load Current	0.15A	9	Stall Torque	230g.cm Min
4	No Load Speed	6100±10%RPM	10		
5	Rated Load Current	0.35A			
6	Rated Load Speed	5400±10%RPM			

Drawn	Tony	22/08/2025	Unit: mm		
Checked	Eva	22/08/2025	Kysan Electronics www.kysanelectronics.com		
Eng Appr.					
Mfg Appr.					
Q.A.					
SKU:			Siae: A4	Weight(Kg):	
1112139			Scale		

MODEL: RS-360SH-14280-15.60
CONSTANT: CCW

VOLTAGE: 12V/DC
DATE: 2025.08.22

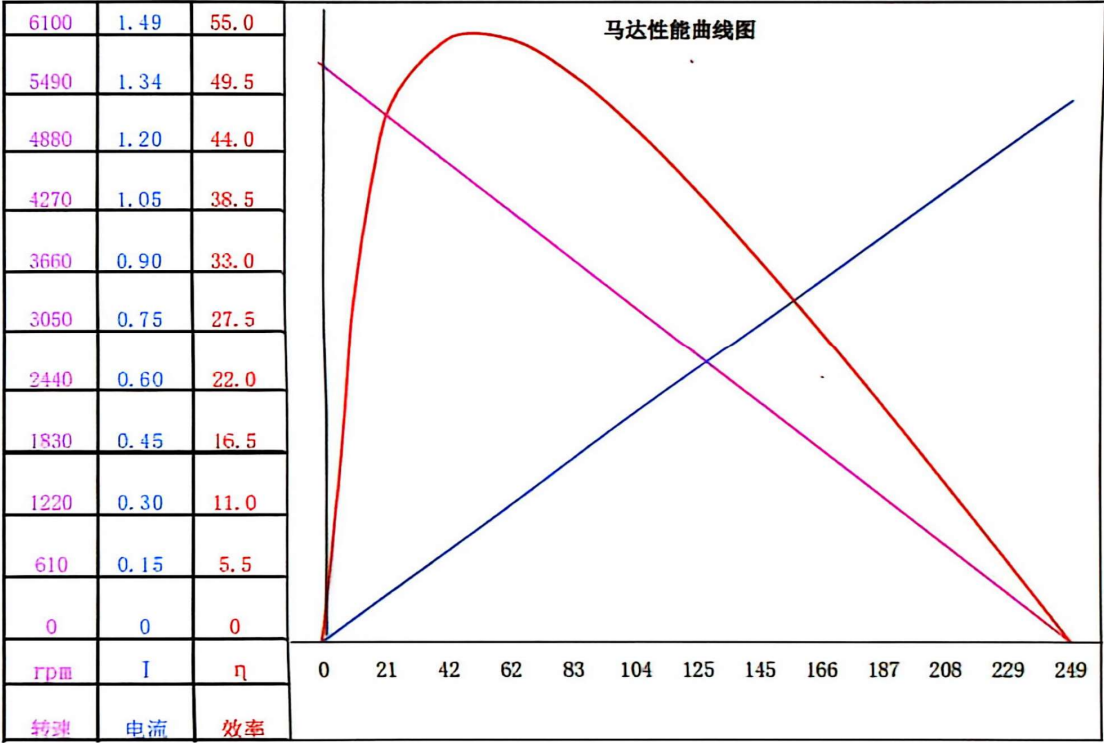

At No Load (空载)
SPEED (转速): 6100 RPM
CURRENT (电流): 0.10 AMP

At stall (Extrapolated) (失速)
TORQUE (力矩): 249.40 G.CM
CURRENT (电流): 1.49 AMP

At maximum efficiency (最大效率)
EFFICIENCY (效率): 55.00 %
TORQUE (力矩): 51.30 G.CM
SPEED (转速): 4850 RPM
CURRENT (电流): 0.40 AMP
QUTPUT (功率): 2.60 WATTS

At maximum power (最大功率)
TORQUE (力矩): 124.70 G.CM
SPEED (转速): 3050 RPM
CURRENT (电流): 0.80 AMP
QUTPUT (功率): 3.91 WATTS

THE CURVES REPRESENT THE THEORENCAL
PERFORMANCE OF THE SAMPLE ONLY.
曲线值表示样品的技术特性

PREPARED: _____

CHECKED: _____

APPROVED: _____