


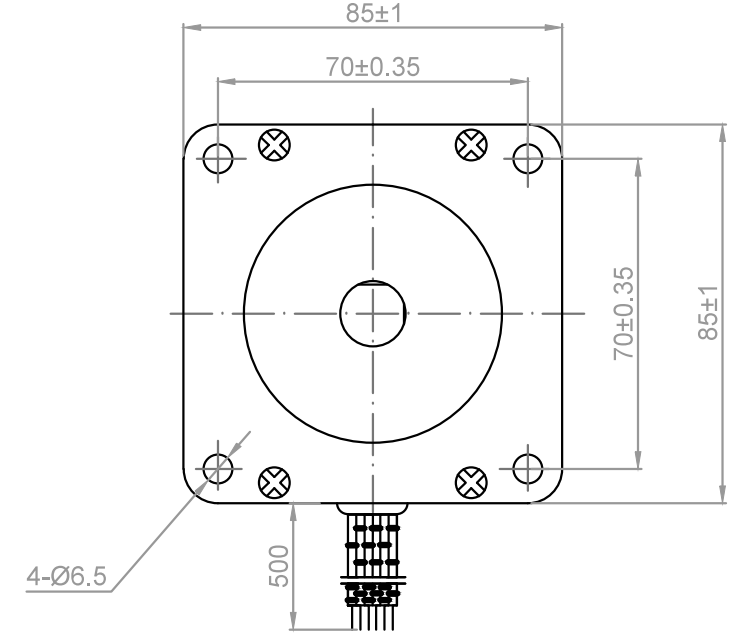


| | | |
|------|------------------------|------------|
| Rev. | Description | Date |
| 01 | Release for Production | 03/08/2013 |

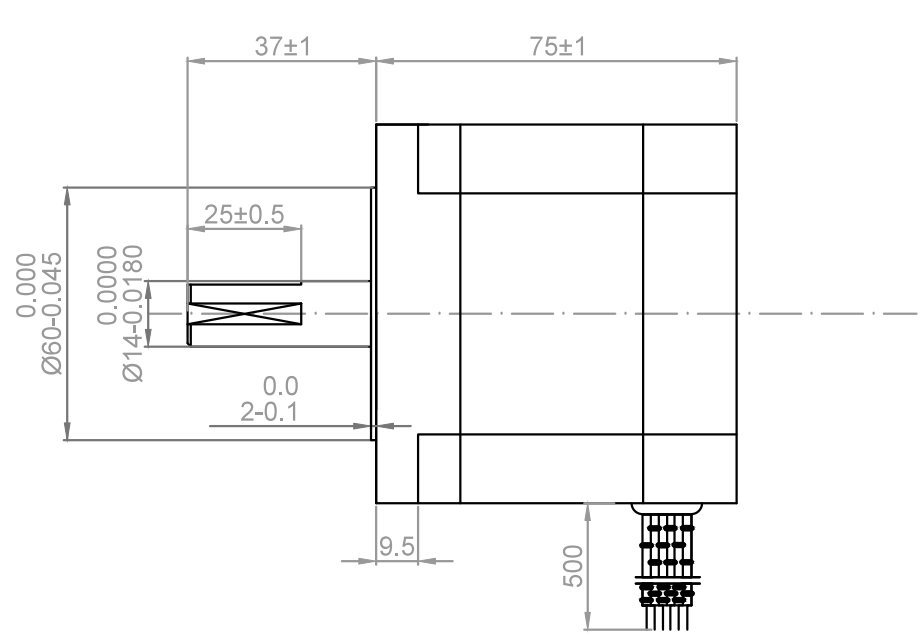

| NO. | Item | Specification | NO. | Item | Specification |
|-----|----------------------|---------------|-----|-----------------------|-----------------|
| 1 | Step Angle | 1.8°±5% | 7 | Holding Torque | 21 Kg.cm |
| 2 | Rated Voltage | 4.4 V | 8 | Insulation Class | B |
| 3 | Current Per Phase | 2 A | 9 | Insulation Resistance | 100 mΩ<500V DC> |
| 4 | Resistance Per Phase | 2.2 Ω | | | |
| 5 | Inductance Per Phase | 8.3 mH | | | |
| 6 | Number of Phase | 4 | | | |

| | | | | | |
|-----------|---------|------------|--|-----------------|-------------|
| Drawn | L | 04/18/2015 | Kysan Electronics www.kysanelectronics.com info@kysanelectronics.com | | |
| Checked | | | | | |
| Eng Appr. | | | | | |
| Mfg Appr. | | | | | |
| Q.A. | | | | | |
| SKU | 1127001 | | Size : A4 | Weight(Kg): 2.3 | Unit: mm |
| | | | Scale: 1:1 | | Sheet 1of 1 |