

中国金龙机电有限公司
JINLONG MACHINERY & ELECTRONICS CO., LTD.

规格书
SPECIFICATION

文件编号/Spec No.	KOTL-B-S290		
品名/Description	圆柱直流马达/Cylindrical DC motor		
型号/Part No.	Q7AL2AX100001		
设计/Designed	审核/Checked	批准/Approved	日期/Date
杨 兰	张 爱 平	葛 佳	2007.03.03

地址: 中国浙江乐清白象进港大道金龙科技园

Add: JinLong Science and Technology Park, Jin Gang Avenue ,
Baixiang, Yueqing, Zhejiang 325603, China

电话/Tel: 0086-577-61806666;

传真/ Fax: 0086-577-61801858

网址/Website: www.kotl.com.cn

型号/Part No.	Q7AL2AX100001
-------------	---------------

1. 适用范围/ General Scope

本规格书适用于空心杯永磁直流电机 Q7AL2AX100001

This specification applies to Coreless Permanent Magnetic DC motors Model: Q7AL2AX100001

2. 使用条件/Operating Conditions

项目/Item		规格/Specifications	条件·备注/Conditions & Remarks
2-1	额定电压 Rated voltage	1.3V DC	
2-2	旋转方向 Direction of Rotation	CW/CCW(clockwise or anticlockwise)	
2-3	马达位置 Motor Posture	全方位 All positions	
2-4	使用电压范围 Operating Voltage	0.9 ~ 1.6V DC	
2-5	使用环境 Operating Environment	-20 ~ 60 10~90% RH	
2-6	保存环境 Storage Environment	-40 ~ 80 , 5~95% RH	无水气凝结 No condensation of moisture

3. 测定条件/Measuring Conditions

项目/Item		规格/Specifications	条件·备注/ Conditions & Remarks
3-1	温度 Temperature	20±2	
3-2	湿度 Humidity	65±5% RH	
3-3	位置 Motor posture	轴向水平 Motor shaft horizontal	将马达固定在试验台上 Lock the motor in a test fixture

标准测试条件为温度 20 ，湿度 65%。如无疑异，也可在温度 5 ~ 35 、湿度 45 ~ 85%的条件下测试。马达测试时，放置方向为轴向水平。/The measurement at 20 & 65%RH is standard. If the judgment is not questionable, recognize measurement at 5 to 35 & relative humidity 45% to 85%. Direction of motor is shaft horizontal.

4. 机械要求/Mechanical Specifications

项目/Item		规格/Specifications	条件·备注/ Conditions & Remarks
4-1	结构 Configuration	见 10. 外形图 As specified in 10. Outline Drawing	Outline Drawing No: Q7AL2AX100001
4-2	外观 Appearance	不含有机械损坏及不充分的浸蚀等。 There shall be no mechanical Damage And inadequate corrosion and so on	目测（容许范围根据样品外形） Visual examination (allowable extent is based on boundary sample)
4-3	轴向间隙 Shaft play	0.05mm ~ 0.3mm	

6. 可靠性/Reliability


项目/Item	规格/ Specifications	判定标准/Judgment
6-1	低温放置 Low temp exposure 温度 /Temperature : -40±2 时间 /Time : 96h	在常温常湿下放置 2h 后，马达应符合项 7 的要求。 After 2 hours exposure in ordinary temperature and humidity, Motors shall be approved as specified in item 7.
6-2	高温放置 High temp. Exposure 温度 /Temperature : 60±2 时间 /Time : 96h	
6-3	湿度放置 Humidity exposure 温度 /Temperature : 40±2 湿度 /Humidity : 90 ~ 95%RH 放置时间 /Exposure time : 96h 无水气凝结/No condensation of moisture	
6-4	振动 Vibration 全振幅 /Displacement : 1.5mm (p-p) 频率 /Frequency: 10 ~ 55Hz 加速度 /Acceleration: 22m/s ² 周期 /Period: 20min 完成 10 ~ 55 ~ 10Hz /20 Minutes log sweep10 ~ 55 ~ 10Hz 方向 /Direction: x, y, z 时间 /Time: 每个方向 2h /Each 2 hours	测试结果应符合项 7 的要求。 After the test motors shall be approved as specified in item 7.
6-5	自然跌落 Free fall 试验状态/Test state:将马达固定在约 75 克 (包括马达本身) 的物体上，落向水泥地面。 Set the motor to the approximately 75g (include the motor) weight of block drop the motor on the concrete floor. 高度 /Height: 1.5m 方向 /Direction: 6 个面 / 6 faces 次数 /Number of times: 每个面 2 次 / Twice 2 each	测试结果应符合项 7 的要求。 After the test motors shall be approved as specified in item 7.

7. 要求/Requirements


项目/Item	判定基准 / Requirements
1)空载转速/Rated speed	不大于初始值±30%/Initial data±30% max
2)空载电流/Rated current	不大于初始值±30%/Initial data±30% max
3)起动电压/Starting voltage	1.0V DC Max

2007.03.03	规格书/Specification	编号/No KOTL-B-S290	代码/code:0	5/8
<p>8.使用时注意事项/Matters to be paid attention to when using motor</p> <p>8-1 电机在运输过程中应小心轻放，避免严重碰撞敲击引起的电机机身和性能受损。 (Please lay the motors carefully in transportation to avoid any serious damage to the motor body or its electric function because of collision.)</p> <p>8-2 请按照规格书中规定的第 2 条(使用条件)来使用和存储电机，否则会影响电机性能。 (Please use and storage motors according to N0.2 item (Operating Conditions) in specification, or else motor characteristics would be affected.)</p> <p>8-3 请在 6 个月内使用。在使用和打开马达外包装时请避免水气凝结。 (Make arrangement to limit the storage period to 6 months or less. Condensation of atmosphere must be avoided in motor usage or opening the packaging of the motor.)</p> <p>8-4 马达应适当的操作、储存和运转环境中均不可存在腐蚀性气体。例如：H₂S、SO₂、NO₂、CL₂ 等。另外存储环境中不可有诸如硅、氰、甲醛水和苯酚等能放射出腐蚀性气体的物质，在电机的机械构造或装置中，如果存在腐蚀性气体，那么这会引起马达不运转。 (For proper operation. storage and operating environment must not contain corrosive gases. For example H₂S. SO₂. NO₂. CL₂. etc. In addition storage environment must not have materials that emit corrosive gases especially from silicon. cyanic. formalin and phenol group. In the mechanism or the set. existence of corrosive gases may cause no rotation in motor.)</p> <p>8-5 请通电后不要长时间堵住机轴。 (Please don't stall the shaft for a long time after powering.)</p> <p>8-6 马达主轴处不应有杂物（如颗粒、纤维物、头发、胶带、胶水等） (There should be no sundries (such as grain, fibre, hair, small tape, glue etc.) in the shaft end play.)</p>				


(Q7AL2型) 圆柱马达包装
Packaging drawing of Q7AL2 cylindrical motor

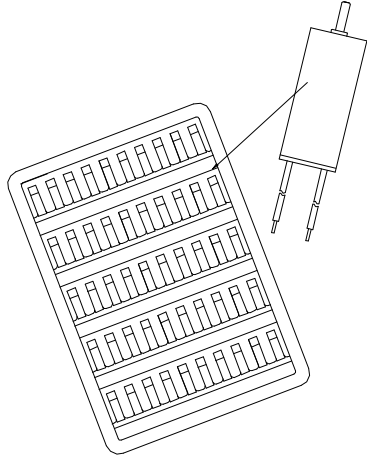

50PCS (1 tray) × 10

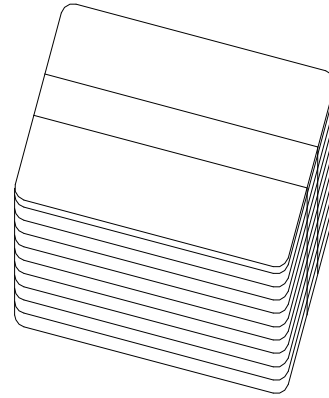

500PCS (1 bundle) × 6

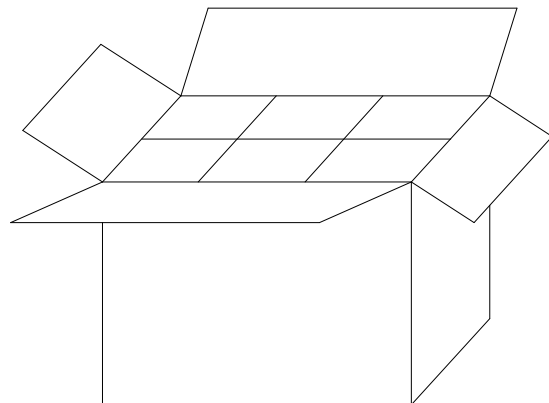

包装试验要求

1. 标准

- (1) 整箱重量小于等于9kg的, 跌落高度设定为75cm.
- (2) 整箱重量大于9kg但小于等于23kg的, 跌落高度设定为60cm.

2. 试验方法:

跌落要求为六面三棱一角.

- (1) 六面: 先从最大两面跌, 然后是中间大小的两面, 最后跌最小的两面, 一共六次.
- (2) 三棱: 指任选三条同一角的棱, 跌落秩序: 最长棱, 中间长度, 最短的, 一共三次.
- (3) 一角: 指上一步三条棱所组成的角, 跌落一次.

3. 判定基准

经过跌落试验后, 产品外观、性能无不良.

Package Test Requirement:

1. Criteria

- (1) The weight of the whole carton less than 9kg, the dropping height is 75cm.
- (2) The weight of the whole carton more than 9kg and less than 23kg, the dropping height is 60cm.

2. Test Methods:

Dropping requirement is 6 faces, 3 aris, 1 angle.

- (1) 6 faces: First dropping with two biggest faces, then dropping with another two middle faces, at last dropping with two smallest faces, once per face, total 6 faces.
- (2) 3 aris: Choose any 3 aris which make up of the same the angle, the dropping sequence is the longest aris, middle aris, shortest aris. Total 3 times.
- (3) 1 angle: Point to the angle which is made up with the 3 aris in the above step. Dropping for 1 time.


3. Judgement Criterion

After drop test, no evidence of damage on the appearance and performance.

Remarks:

- 1000PCS/CTN: 34cm × 24cm × 27.5cm
- 2000PCS/CTN: 47cm × 34cm × 27.5cm
- 3000PCS/CTN: 51cm × 47cm × 27.5cm


OPP TAPE

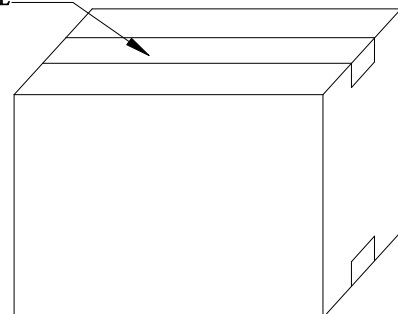

10. 外形图/Outline Drawing

Q7AL2AX100001

- 技术要求/Technical requirement**
- 1.额定电压/Rated voltage:1.3V
 - 2.空载电流/Non load current:40mA Max
 - 3.空载转速/Non load speed:10000 ± 2000rpm
 - 4.堵转电流/Stall current:480mA Max
 - 5.端子阻抗/Terminal resistance:3.4Ω (± 20%)
 - 6.起动电压/Starting voltage:0.8V Max
 - 7.导线规格/Lead wire spec: AWG30 UL1571
 - 8.未注线性公差为/Unmarked tolerance: ± 0.1mm
 - 9.A向压力/Pressure along A direction :20N Max

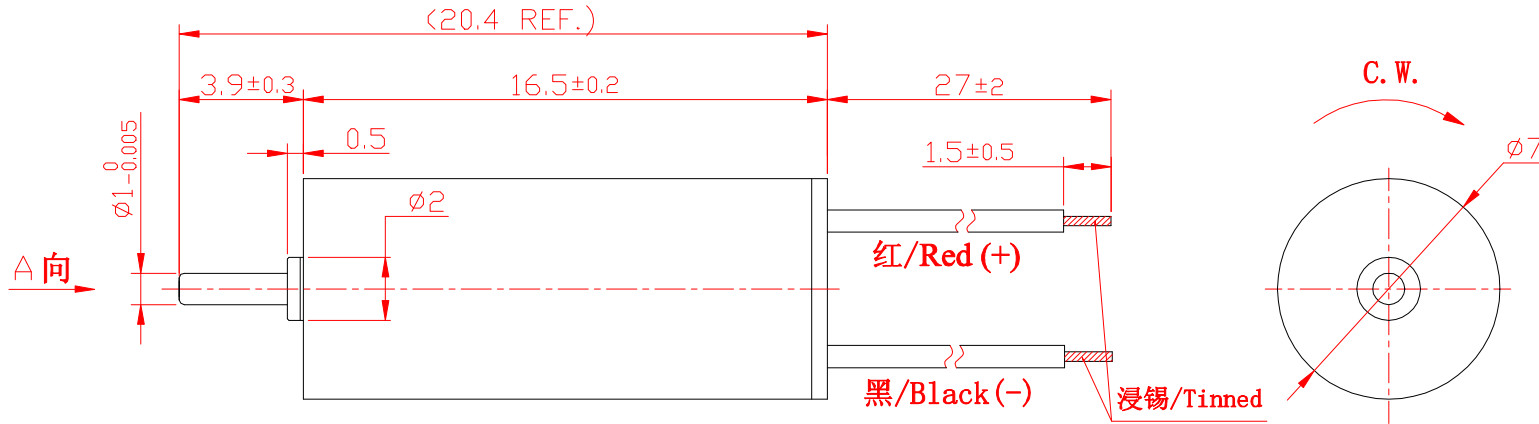

借(通)用件登记

底图总号

签字

日期

标记	处数	分区	更改文件号	签名	日期
设计	杨 兰	07.03.03	标准化	林乐爱	07.03.03
校对					
审核	张爱平	07.03.03			
工艺	吴宏良	07.03.03	批准	葛 佳	07.03.03

阶段标记	重量	比例
		5:1
共 页	第 页	

金龙机电有限公司

外形图

Q7AL2AX100001

2007.03.03

规格书/Specification

编号/NO. K0TL-B-S290

代号/code: 0

7/8

